FEATURES

- Adopt imported low power consumption and low noise atmospheric pressure core
- Use panel touch, can be set on site
- High accuracy up to 0.25%F.S, good stability
- High protection IP65 rated design
- Small and beautiful shell design, using LCD display, easy to use



DESCRIPTION


The LFM57 series atmospheric pressure transmitters are suitable for atmospheric pressure monitoring in various environments. Product installation takesup little space. Customers can customize the Settingson site. The product adopts imported digital atmospheric pressure core, which has the characteristics of sensitive pressure response, stable long-term output and superior preformance. The products are suitable for small weather stations, altimeters, archives and other places requiring atmospheric pressure monitoring.

SPECIFICATION


Medium	Air(non-condensing)				
Measuring range	15kPa~130kPa				
Pressure type	Absolute pressure				
Display	Optional LCD display, display area 45X30mm				
Display resolution	0.01kPa				
Overload pressure	200Kpa				
Accuracy	±0.25%F.S				
Operating temperature	-20°C~70℃				
Compensation temperature	-10°C~60°C				
Storage temperature	-40°C~70°C				
Protection grade	IP65				
Electrical connection	Two-wire system	Three-wire system	Four-wire system ①		
Output signal	4~20mA	0~10VDC	RS485		
Power supply	12~30VDC	12~30VDC/24VAC±20%			
Communication	RS-485 Standard interface, Modbus RTU protocol				
Shell material	Flame retardant PC shell(UL94-V0), ABS probe housing and polymer filter layer				
Output load	≤250Ω (current output),≥5KΩ (voltage output)				

① When the product is powered by an AC power supply, it is recommended to use an isolated AC power supply.

DIMENSION(mm)

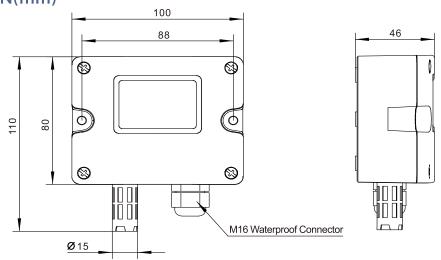


WIRING

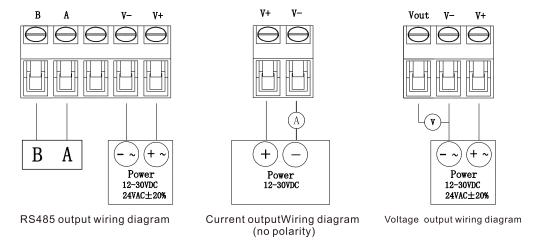

* When the RS485 type uses AC power supply , it is necessary to use isolated AC power supply , otherwise it may damage related connected devices.

INSTALLATION METHOD

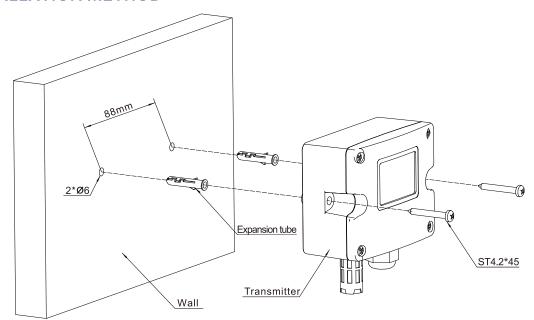

ORDER REF NO.

Code and Description			Remark	
LFM57				Model
	N	No display screen		Display Function
Γ	0	Have a display screen		Display Function
		A4	4~20mA	
		V10	0~10VDC	Output Method
		RS	RS-485/Modbus	
				·
LFM57-	0	A4		Selection Example